



**Multi Fleeting  
Belt Wrap Capstan**

05


# Capstan and Caterpillars



**Twin Wheel Capstan**




**Vertical Belt Capstan**

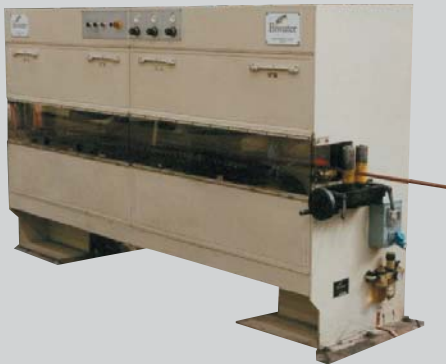

**Articulated Caterpillar large pulling force**



**Pipe Parallel Caterpillar**

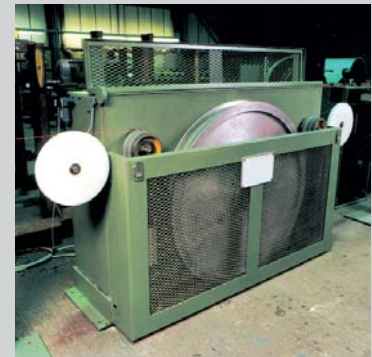

**VB 40 Capstan**

## Specifications

Machine Type	Description	Speed
Twin Wheel Capstan	Suitable for Bare Conductors, good pulling force without outside contact pressure	0 to 800m/min
Pipe Parallel Caterpillar	Suitable for tube, rods, fillers with constant diameters low pulling force	0 to 200m/min
Multi Belt Wrap Capstan	Aluminium tube & solid conductors with sensitive surfaces	0 to 150m/min
Single Belt Wrap Capstan	High speed pulling unit with minimal belt wear	0 to 1000m/min
Articulated Caterpillar	Twin belt unit with individual track cylinders suitable for extrusion lines	0 to 300m/min
Wide Belt Caterpillar	Twin belt unit with extra wide belt for flat rectangular products or multi-rods	0 to 200m/min
VB 40 Capstan	40" vertical belt capstan	0 to 1200m/min